

SPAX®




SPAX – Indoor

SPAX Indoor.
For interior applications.



MADE IN
Germany



SPAX – Indoor

SPAX-M
for MDF boards



Secure connection of MDF boards

For special application on MDF boards and other thin-walled boards made of derived wood products.

- The specially designed *CUT point* ensures exact screw positioning.
- **SPAX typical ground serrations** for quick and secure fastening.
- Effectively reduces splitting and bulging of the MDF material when turning into thin or small surfaces.
- The screw's geometry allows MDF boards and thin chipboard to be screwed together without pre-drilling (wood-dependent).
- The slender head with the ribbed underside countersinks easily into the material.



Flat countersunk head, T-STAR plus


Small 75° milling head, *CUT point*, case hardened, slide-coated



A9J



Dimensions [mm]				Packaging units			SPAX-No.	EAN code
Thread Ø d1	Length total Ls	Length partial thread LgT	BIT size T	SPAX BOX [pieces]	Master carton [pieces]	Pallet qty		
3.5 Ø d _k = 6.0 mm	40	28	15	200	2,000	224,000	0441010350403	4003530168437
	45	30	15	200	2,000	126,000	0441010350453	4003530168444
	50	35	15	200	2,000	126,000	0441010350503	4003530168451
4.0 Ø d _k = 7.0 mm	40	28	20	200	2,000	126,000	0441010400403	4003530168468
	45	30	20	200	2,000	126,000	0441010400453	4003530168475
	50	35	20	200	2,000	126,000	0441010400503	4003530168482
	60	40	20	100	1,000	63,000	0441010400603	4003530168499
4.5 Ø d _k = 8.0 mm	45	30	20	200	2,000	126,000	0441010450453	4003530168505
	50	35	20	200	2,000	64,000	0441010450503	4003530168512

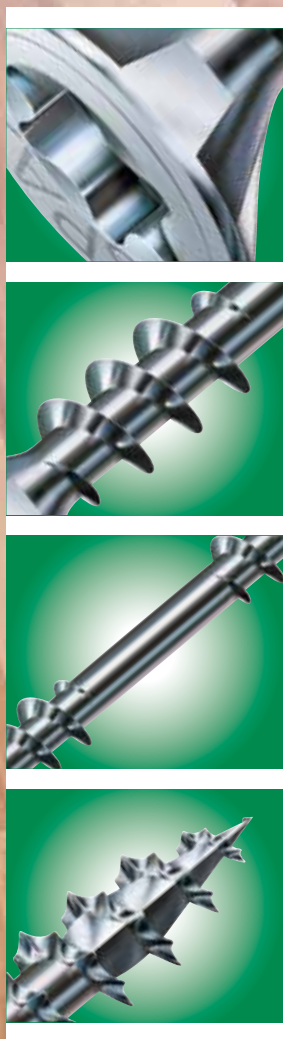

SPAX – Indoor

SPAX

The flooring screw



The ideal screw for laying solid-wood flooring


The flooring screw for OSB and chip boards with *4CUT* and fixing thread minimises occurrence of creaking noises in the floor construction.

The SPAX flooring screw almost countersinks by itself thanks to the milled ribs on the head. In addition, the special T-STAR *plus* recess prevents the BIT from slipping, therefore ensuring an ideal distribution of the torque. The fixing thread allows a solid and permanent connection of two wood components. It effectively reduces creaking caused in the floor structure. The *4CUT* minimises wood splitting.



The features

- **4CUT**
no pre-drilling (wood-dependent), its point effectively reduces the splitting effect. The square end pushes aside the fibre of the wood and reduces the screwing-in torque.
- **Ground serrations**
for quick and secure fastening.
- **Fixing thread**
allows safe and lasting connection of two pieces of wood.
- **MULTI Head**
flush countersinking. Mills in wood.

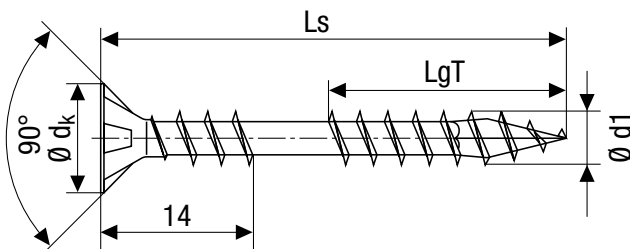

Flat countersunk head, T-STAR *plus*


4CUT, MULTI Head, fixing thread, case hardened, slide-coated



A9J



Dimensions [mm]				Packaging units			SPAX-No.	EAN code
Thread Ø d1	Length total Ls	Length partial thread LgT	BIT size T	SPAX BOX [pieces]	Master carton [pieces]	Pallet qty		
4.5 Ø dk = 8.8 mm	50	21	20	500	5,000	140,000	0541010450505	4003530246906
	60	26	20	500	5,000	140,000	0541010450605	4003530246913
	70	31	20	500	2,500	140,000	0541010450705	4003530246920
	80	31	20	200	2,000	64,000	0541010450805	4003530246937

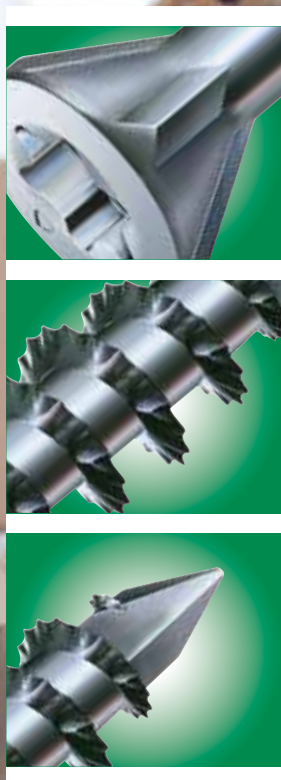

SPAX – Indoor

SPAX

for solid-wood flooring



The ideal screw for **solid wood floors**

SPAX for laying solid wooden flooring. Thanks to the special screw geometry including the *CUT point* material splitting is reduced effectively.

The characteristic screw point ensures an immediate grip, cutting ribs facilitate sinking, and the small milling head allows the **SPAX** to pull into the material in a particularly easy way.

The perfect connection of tongue and groove.



The features

- Lower screwing in torques, shorter screwing in times and stronger grips due to the ground serrations.
- The optimised head geometry ensures safe slot seat, high force closure and longer slot life.
- The high hardness of the thread edges and the ductile screw core allow powerful penetration into the material.

Flat countersunk head, T-STAR plus

Small 60° milling head, *CUT point*, case hardened, slide-coated



A9J



Dimensions [mm]				Packaging units			SPAX-No.	EAN code
Thread Ø d1	Length total Ls	Length partial thread LgT	BIT size T	SPAX BOX [pieces]	Master carton [pieces]	Pallet qty		
3.5 Ø d _k = 6.0 mm	35	20	10	500	5,000	160,000	35703503203011	4003530246944
	45	28	10	500	5,000	160,000	35703503201011	4003530246951
	55	35	10	500	5,000	160,000	35703503202011	4003530246968



SPAX IS NOT ONLY CALLED "INTERNATIONAL" – IT ACTUALLY IS!

Production is carried out at our site in Ennepetal and we export SPAX products to more than 40 countries across all continents.



Image credits:
p. 1: ©pivoesempre, thinkstock · p. 2: ©diego cervo, panthermedia · p. 4: ©Monster, Fotolia · S. 8: ©doctortee, panthermedia
Product photos are non-binding sample images. The sole basis for purchase is the product description.

5115 · 12/2018 · GB/Export · HUTH

SPAX International GmbH & Co. KG
ALTENLOH, BRINCK & CO - GRUPPE SEIT 1823

Kölner Straße 71-77 · 58256 Ennepetal · Germany
Tel.: +49-23 33-799-1967 · Fax: +49-23 33-799-199
info@spax.com · www.spax.com

You can also find us at:

facebook.com/spax
 instagram.com/spax_international
 youtube.com/user/SPAXinternational

SPAX No. 6015

